



Cranked Underfloor Vents & Accessories

- Our telescopic vent adjusts between 3 and 5 brick courses, with a minimum cavity width of 50mm. Airflow - 6000mm² (Building Regs).
- Recommended spacing not more than 2 metre centres and 1 metre centres when used with a clay airbrick.
- Our duct adaptor fits on the lower rear opening of a telescopic vent to allow a standard 110mm underground drainage pipe to be connected.
- Our vertical extension fits between the upper and lower parts of a telescopic vent to accommodate a vertical step of more than 5 brick courses. Can be multi stacked for greater height.



Don't forget Wall Ties
see page 23


Ref	Description	Unit
VT00007	Cranked Underfloor Vent	Each
VT00008	150mm Vertical Extension Piece	Each



Airbricks - Plastic

- A robust polypropylene airbrick, used for underfloor ventilation. Can be clipped together to form 9" x 6" and 9" x 9" sizes.
- Airflow 6170mm².
- Can be used with a cavity sleeve and telescopic vent.
- Box quantity 20.


Ref	Description	Unit
VT00006	9x3" Terra/Red Plastic Airbrick	Each
VT00003	9x3" Buff Plastic Airbrick	Each
VT00005	9x3" Grey Plastic Airbrick	Each
VT00002	9x3" Black Plastic Airbrick	Each



Cavity Sleeves - Plastic

- Our cavity sleeve suits single or multiple stacked airbricks to the required airflow.


Ref	Description	Unit
VT00009	220x70mm Black Plastic Cavity Sleeve 6500mm ² airflow	Each
VT00010	220x140mm Black Plastic Cavity Sleeve 13000mm ² airflow	Each



Weep Vents

- A product for discharging water from external walls, placed at 450mm centres to comply with NHBC requirements.
- Lintel stop ends - to prevent water running off the ends of lintels into the cavity.
- Extension pieces - for use with the concealed weep vent, to accommodate wall thicknesses larger than 100mm.


Ref	Description	Unit	
VT00017	Terracotta Cavity Weep Hole Vent	Each	NEW
VT00015	Brown Cavity Weep Hole Vent	Each	NEW
VT00014	Buff Cavity Weep Hole Vent	Each	NEW
VT00013	Black Cavity Weep Hole Vent	Each	NEW
VT00012	White Cavity Weep Hole Vent	Each	NEW
VT00016	Grey Cavity Weep Hole Vent	Each	NEW
VT00018	Timloc Natural/Clear Concealed Tunnel Weep	Each	NEW
VT00021	Timloc Buff Concealed Tunnel Weep Hole	Each	NEW
VT00024	Timloc Terracotta Concealed Tunnel Weep Hole	Each	NEW

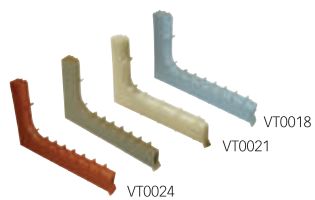

Rigid Cavity Closer

- Universal closer for eliminating damp and 'cold bridging' around doors, windows and sills.
- BBA approved, satisfies NHBC standard.
- Standard cavity options 50-150mm.
- Comes with integral weather seal.
- Order brick ties separately.
- Bespoke cavity widths available to order, please enquire.

Ref	Description	Unit
D30083	50mm Insulated Cavity Closer	2.4m
D30078	90-100mm Insulated Cavity Closer	2.1m
D30083a	50-100mm Multicloser Insulated Cavity Closer	2.4m
D30084	100-150mm Multicloser Insulated Cavity Closer	2.4m
D30081	150mm Insulated Cavity Closer	2.1m

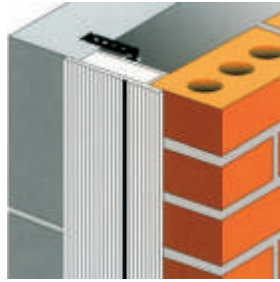

Insulated Vertical D.P.C.

- Insulated vertical DPC to prevent cold bridging around openings when returning blockwork.

Ref	Description	Unit
D30050	165mm Insulated Vertical DPC	10m



Cavity Stop Sock Fire Barriers

- 1200mm strips of non-combustible rock fibre. Various thicknesses to suit 50-150mm cavity walls. The socks are compressed between the inner and outer cavity walls to provide a 30 minute cavity fire barrier as specified in the Approved Document B of Building Regulations 1991.

Ref	Description	Unit
D30042	65x65mm Cavity Fire Barrier/Stop Sock	1.2m
D30040	100-120mm Cavity Fire Barrier/Stop Sock	1.2m



Cavity Wall Insulation

- Foil board designed to fit in the cavity, for full fill cavity insulation. A low cost solution for a high performance thermal insulation.

Ref	Description	Unit
ZC0006	Cavity Batts 1200x455x50mm	Pack
ZC0011	Cavity Batts 1200x455x75mm	Pack
ZC0014	Cavity Batts 1200x455x100mm	Pack
M60020	Insulation Retaining Clips	Pk 250



M60020

TIP

Ring the Sales Office for any insulation supplies
01803 866599

Expansion Joint

- Closed cell polyethylene foam, pre-cut to brickwork joints, with a removable section to form sealant void.
- Other available thicknesses to order - 12mm, 15mm, 20mm & 25mm.
- Other available widths to order - 175mm, 200mm
- Can also be used as a perimeter expansion for heated screed floors.

Ref	Description	Unit
D30035	100x10mm Movement/Expansion Joint Filler	Roll
D30036	150x10mm Movement/Expansion Joint Filler	Roll



D30035




Don't forget Movement Ties

see page **25**

Brick Reinforcement

- Expanded metal mesh, available in varying widths, stainless or galvanized steel. Designed to be incorporated into masonry for crack control. 20m roll.
- Welded ladder type Bed Joint Reinforcement with 3mm outer wires, generally used as a structural product, also ideal for crack control. Stainless Steel Grade 304. Also available to order, widths 150, 160, 175mm. Galvanised also available to order.

Ref	Description	Unit
ML0006	64mmx20m Galv Exp. Brick Reinforcement	Roll
ML0007	114mmx20m Galv Exp. Brick Reinforcement	Roll
ML0008	178mmx20m Galv Exp. Brick Reinforcement	Roll
ML0009	229mmx20m Galv Exp. Brick Reinforcement	Roll
ML0015	64mmx20m St/St Exp. Brick Reinforcement	Roll
ML0011	114mmx20m St/St Exp. Brick Reinforcement	Roll
ML0012	178mmx20m St/St Exp. Brick Reinforcement	Roll
ML0013	229mmx20m St/St Exp. Brick Reinforcement	Roll
ML0005	3 x 60mm x 2.7m St/St Ladder Reinforcement	Each

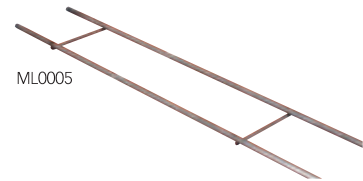

ML0005


Wall Connectors

- TieFast Stainless Steel wall profile.
- 2x1.2m lengths per pack.
- BBA Approved.

Ref	Description	Unit
M60022	St/St Wall Starter/Connector c/w Fixing Pack	Pack



M60022



Don't forget Drill Bits

see page **93**